


312 Cable Assembly



DIMENSIONS

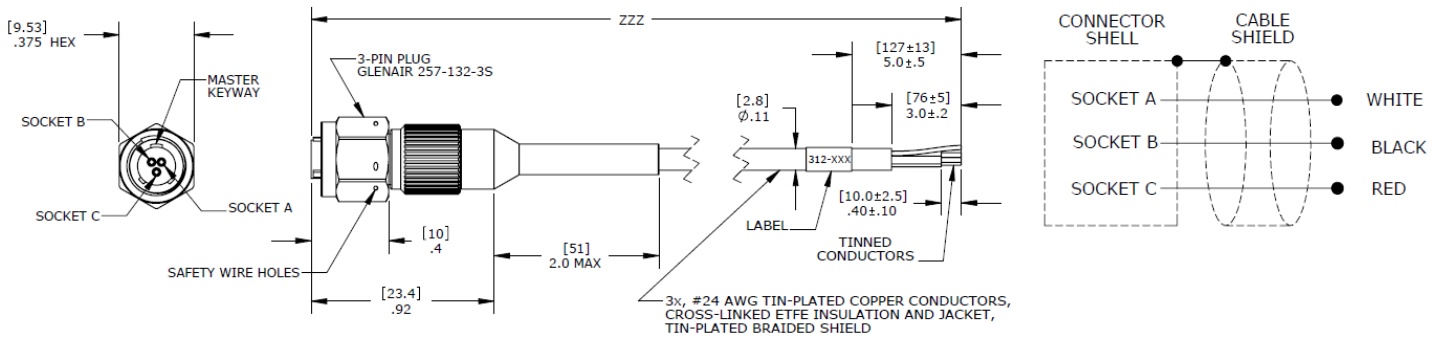

DESCRIPTION

IEPE plug and play accelerometer cable assembly. Standard cable length is 120 inches. Cable features safety wire holes, #24 AWG tin-plated copper conductors and 3-pin Glenair plug. Mates with accelerometer Model 7204A.

FEATURES

- Safety Wire Holes
- Cross-Linked ETFE Insulation and Jacket
- Tin-Plated Braided Shield
- #24 AWG Tin-Plated Copper Conductors
- 55°C to +150°C Temp Range

APPLICATIONS

- Health Usage Monitoring Systems
- Flight Testing
- Gearbox Vibration Monitoring
- Harsh Environments
- High Frequency

312 Cable Assembly

NORTH AMERICA

Measurement Specialties, Inc.

1000 Lucas Way
Hampton, VA 23666
USA

Sales and Customer Service

Tel: +1-800-745-8008 or
+1-757-766-1500
Fax: +1-757-766-4297
t&m@meas-spec.com

EUROPE

**Measurement Specialties
(Europe), Ltd.**

26 Rue des Dames
F78340 Les Clayes-sous-Bois
France

Sales and Customer Service

Tel: +33 (0) 1 79 33 00
Fax: +33(0)1 34 81 03 59
t&m@meas-spec.com

ASIA

**Measurement Specialties
(China), Ltd.**

No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District

Shenzhen, China 518057

Sales and Customer Service

Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
t&m@meas-spec.com

ORDERING CODE

312-ZZZ (-ZZZ designates length in inches, -120 standard)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.