

## XS-B Series - Subminiature AC LVDT



- Micro size
- Low mass core
- 3/16 or 1/4 inch housing diameter
- Stroke ranges  $\pm 0.1$  and  $\pm 0.25$  inch
- Operating frequency up to 20kHz
- Standard or threaded bulkhead mount
- Stainless steel housing
- Magnetically shielded

### DESCRIPTION

The **XS-B Series** of subminiature LVDTs were specifically designed for micro applications, where small physical size is the prime requirement. Featuring an extremely low core weight, the XS-B Series are the perfect choice for high speed displacement measurements, measurement of delicate materials and films, or where heavier cores would influence the measurement result.

The XS-B Series are available in stroke ranges of  $\pm 0.1$  inch [ $\pm 2.54$ mm] or  $\pm 0.25$  inch [ $\pm 6.35$ mm], standard or threaded mounting configurations, and in flying lead or polyurethane jacketed lead termination (all model dependent). All models incorporate a ferromagnetic stainless steel housing providing electromagnetic and electrostatic shielding. The XS-B Series is compatible with most Measurement Specialties LVDT signal conditioners, controllers and readouts (*consult factory*).

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

MEAS acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.

### FEATURES

- 0.250" [6.35mm] max diameter
- Threaded mount version available (XS-BG)
- Lead-wires (XS-B) or cable (XS-BG)
- Axial and radial cable exit (XS-BG)
- Electromagnetic shielding
- Stainless steel housing
- 220°C operation (*Option; call factory*)
- Calibration certificate supplied with all units

### APPLICATIONS

- Servomechanisms
- Robotics
- Surfometers
- Measurement of films/delicate materials
- Space restrictive applications
- Multi-point measurement of small components
- Multi-finger calipers for pipe contour inspection
- Measurements at high displacement speeds

# XS-B Series - Subminiature AC LVDT

## PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS							
Parameter	XS-B 099			XS-B 249			XS-BG 100
Stroke range	±0.10 [±2.54]			±0.25 [±6.35]			±0.10 [±2.54]
Test input frequency	2.5kHz	5kHz	10kHz	2.5kHz	5kHz	10kHz	5kHz
Sensitivity V/V/inch [mV/V/mm]	1.5 [59.1]	2.7 [106]	4.0 [157]	1.4 [55.1]	1.7 [66.9]	1.85 [72.8]	5.25 [207]
Output at stroke ends (*), mV/V	150	270	400	350	425	462	525
Phase shift	+69°	+55°	+38°	+35°	20°	12°	+3°
Input impedance (PRIMARY), ohms	30	40	50	110	160	210	960
Output impedance (SECONDARY), ohms	45	60	75	135	160	200	2150
Non-linearity, maximum	±0.5% of FR			±0.5% of FR			±0.2% of FR
Input voltage, sine wave	1 VRMS			1 VRMS			3.5 VRMS
Input frequency range	2.5 to 20kHz (Standard test frequency is 2.5kHz)						2.5 to 20kHz
Null voltage, maximum	0.5% of FRO						

ENVIRONMENTAL SPECIFICATIONS & MATERIALS		
Parameter	XS-B 099 and XSB 249	XS-BG 100
Operating temperature	-67°F to +302°F [-55°C to +150°C]	-40°F to +140°F [-40°C to +60°C]
Shock survival	1, 000 g (11ms half-sine)	1, 000 g (11ms half-sine)
Vibration tolerance	20 g up to 2KHz	20 g up to 2KHz
Housing material	Kovar	AISI 430 Series stainless steel
Electrical connection	Five lead-wires Stranded 36 AWG PTFE insulated 1 foot [0.3m] long Axial exit	Shielded cable with Polyurethane jacket Six conductors, stranded 32 AWG, PTFE insulated 6.5 feet [2m] long Axial and radial exit (**)
IEC	IP61	IP61

**Notes:**

Dimensions are in inch [mm]

All values are nominal unless otherwise noted

Electrical specifications are for the test frequency indicated in the table

(\*): Unit for output at stroke ends is millivolt per volt of excitation (input voltage)

(\*\*): Adapter provided for radial exiting of cable


FR: Full Range is the stroke range, end to end; FR=2xS for ±S stroke range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range

# XS-B Series - Subminiature AC LVDT


## MECHANICAL SPECIFICATIONS

Parameter	XS-B 099	XS-B 249
Main body length "A"	0.88 (22.35)	1.88 (47.75)
Core length "B"	0.50 (12.7)	1.25 (31.75)
Body weight, oz [g]	0.14 [4.0]	0.31 [8.8]
Core weight, oz [g]	0.013 [0.37]	0.021 [0.60]

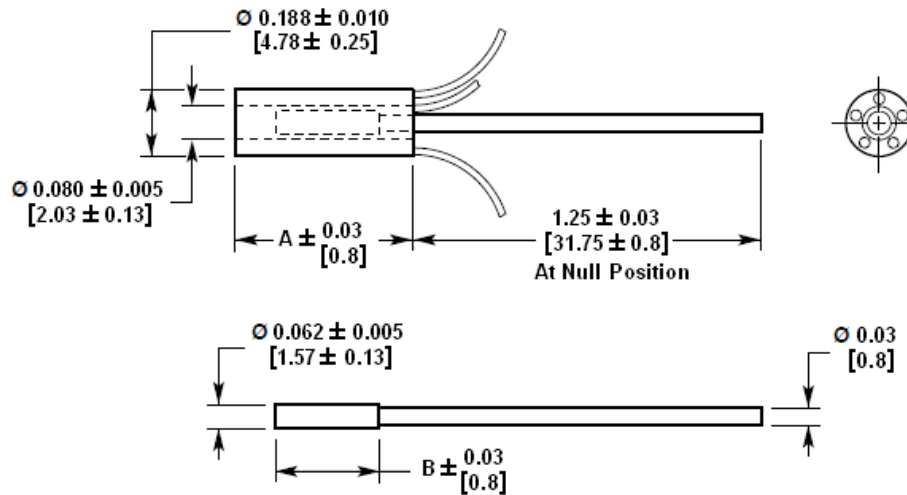

### XS-B

(Supplied with extension rod already attached to core)

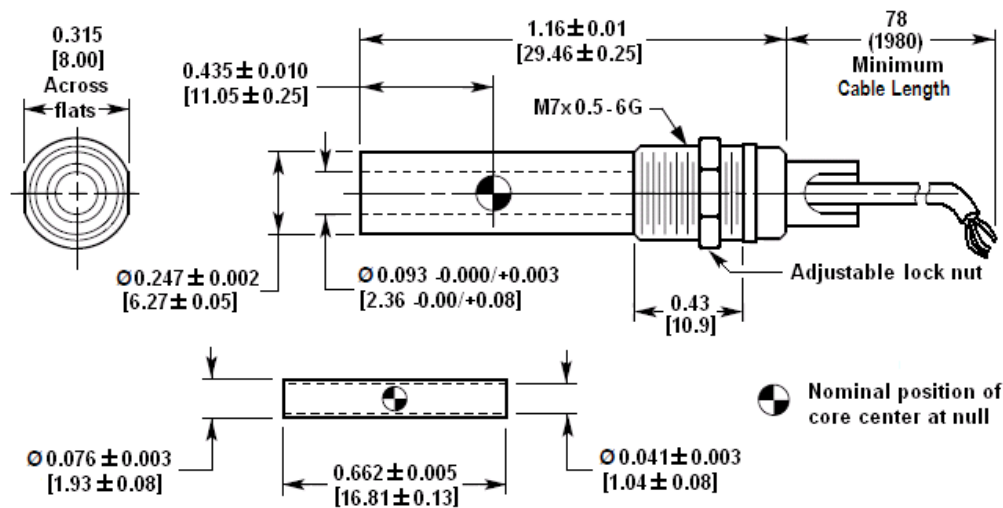


### 100 XS-BG

Dimensions are in inches [mm]

# XS-B Series - Subminiature AC LVDT

## WIRING INFORMATION

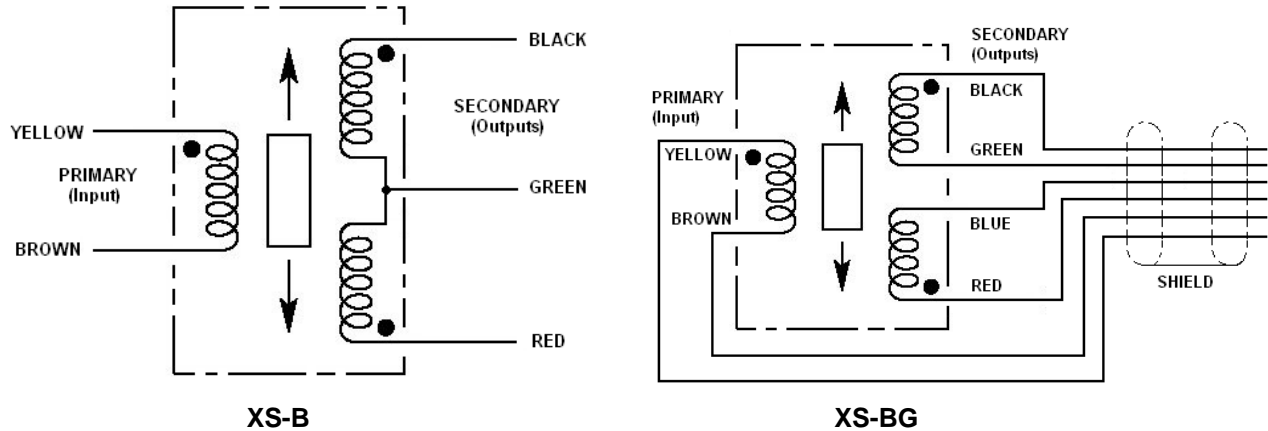

## ORDERING INFORMATION

Description	Model	Part Number
±0.1 inch LVDT	XS-B 099	02560629-000
±0.25 inch LVDT	XS-B 249	02560630-000
±0.1 inch LVDT	XS-BG 100	02560997-000

Refer to our "[Accessories for LVDTs](#)" data sheet for our LVDT signal conditioning instrumentation and other accessories.

## TECHNICAL CONTACT INFORMATION

NORTH AMERICA	EUROPE	ASIA
Measurement Specialties, Inc. 1000 Lucas Way Hampton, VA 23666 United States Phone: +1-800-745-8008 Fax: +1-757-766-4297 Email: <a href="mailto:sales@meas-spec.com">sales@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: <a href="mailto:info.de@meas-spec.com">info.de@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>	Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: <a href="mailto:info.cn@meas-spec.com">info.cn@meas-spec.com</a> Web: <a href="http://www.meas-spec.com">www.meas-spec.com</a>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.